


3M AC202D

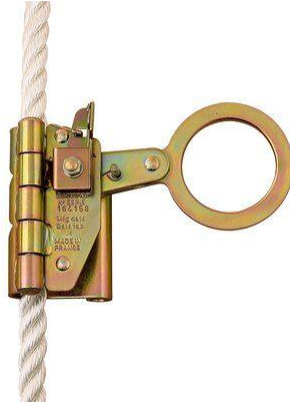

Details

- Mobile design automatically follows user
- Manual option allows user to fix in place
- Cam locking system for safety
- Detachable anywhere along the lifeline
- Durable and lightweight corrosion resistant construction
- For use with 5/8" (16 mm) diameter polyester/polypropylene blend rope lifeline
- Use with 3 ft. (0.9 m) shock absorbing lanyard

Mobile and manual rope grab for use on 5/8" (16 mm) polyester/polypropylene blend rope lifeline.

We have you covered with a complete line of PRO™ mobile and static rope grabs, along with a wide variety of lifelines to meet your work needs. All of our rope grabs are made of high grade corrosion resistant materials. Our most popular PRO™ rope grabs automatically follow you, giving you maximum freedom and hands-free operation. They can be detached or removed anywhere along the lifeline. The rope grabs utilize a cam lever brake to lock the rope grab onto the lifeline in case of a fall; some also incorporate a secondary inertial brake in the event the operator holds the device open in a panic situation. They will also reduce the arresting forces on a worker if there is a fall. We also manufacture a complete range of lifelines for use with our rope grabs.

Specifications

Attachment Type	None
Brand	Cobra™
Case Quantity	1
Dimensions	6.50x2.30x4.20in
Install Type	Temporary
iSafe Equipped	No
Number of Users	One
Product Series	Cobra™
Product Type	Mobile/Manual Rope Grab
Recommended Industry	Construction, General Industrial, Utilities
Standards/Approvals	ANSI A10.32, OSHA 1926.502
Structure Type	None
Weight	2 lb.
Weight Capacity	310 lbs. (141 kg)